## ELEVATION CERTIFICATE

## FEDERAL EMERGENCY MANAGEMENT AGENCY

NATIONAL FLOOD INSURANCE PROGRAM This Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to evation information necessary to ensure compliance with applicable community floodplain management ordinances, to Tituline the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR) instructions for completing this form can be found on the following pages. FOR INSURANCE COMPANY USE SECTION A PROPERTY INFORMATION POLICY NUMBER CING OWNER'S NAME Saxter Companies COMPANY NAIC NUMBER T. DORESS (Including ApL. Unit, Suite and/or Bidg, Number) OR P.O. ROUTE AND BOX NUMBER Fivershire Place TITE DESCRIPTION (Lot and Block Numbers, etc.) Int 76. Rivershire, Lincolnshire ZIP CODE STATE 60069 Illinois tessinshire SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION as the following from the proper FIRM (See Instructions): 6. BASE FLOOD ELEVATION (in AO Zones, use depth) S. FIRM ZONE 4. DATE OF FIRM INDEX 'a-suffix' 2. PANEL NUMBER CMMUNITY NUMBER .6471 A-3 6/11/82 C 0005 10373 Tribale the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Cother (describe on back) 22 Zones A or V. where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate runity's BFE: 1111 11 feet NGVD (or other FIRM datum-see Section B, Item 7) SECTION C BUILDING ELEVATION INFORMATION he Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best RM Lones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation 16:419:17] feet NGVD (or other FIRM datum-see Section B, Item 7). 1. FEW Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from The selected diagram, is at an elevation of \_\_\_\_\_ feet NGVD (or other FIRM datum-see Section B, Item 7). □ . □ .□ .□ I feet above □ or traiow (check one) the highest grade adjacent to the building. the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference Revelly elevated in accordance with the community's floodplain management ordinance? 

Yes 
No 
Unknown indicate the elevation datum system used in determining the above reference level elevations: X NGVD '29 C Other (describe whice: Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on FRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion 12.36on under Comments on Page 2.) Ferauch reference mark used appears on FIRM: X Yes No (See instructions on Page 4) Construction drawings < NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate whoe required once construction is complete.) The elevation of the lowest grade immediately adjacent to the building is: 1 5 14 18 18 feet NGVD (or other FIRM datum-see action B, Item 7). SECTION D. COMMUNITY INFORMATION ne community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is: the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest comes defined by the ordinance is: 1 11 11 11 feet NGVD (or other FIRM datum-see Section B, Item 7). Date of the start of construction or substantial improvement. CERTA SERVICE TE POR CONTRACTOR

NA OIMET-31, MAY ON

## SECTION E CERTIFICATION

is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation the number of the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required.


The third officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the maker. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an interpretative may also sign the certification.

Table level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, where diag. location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not tred in the certification under Comment below. The diagram number, Section C, Item 1, must be opening of the certification under Comment below.

The Line information in Sections B and C on this certificate represents my best efforts to interest the data evaluate the cate evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluate the cate evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluation in Sections B and C on this certificate represents my best efforts to interest the data evaluation in Section B and C on this certificate represents my best efforts to interest the data evaluation in Section B and C on this certificate represents my best efforts to interest the data evaluation in Section B and C on this certificate represents my best efforts to interest the data evaluation in Section B and C on this certificate represents my best efforts to interest the data evaluation in Section B and C on this certificate represents my best efforts to interest the data evaluation in the data

. . . . . a towski POFESSIONAL - ---- NAME LICENSE NUMBER (or A x Seal) ENGINEER Henderson and Bo 3 ( 3 ( COMPANY NAME 60126 MINOSIS **Elmhurst** ZIP 834-9406 (708)4/30/92 PHONE DATE. TIME

and should be made of this Certificate for: 1) community official, 2) Insurance agent/company, and 3) building owner.

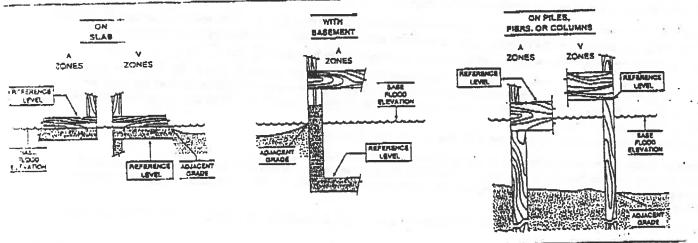

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Servations for all A Zones should be measured at the top of the reference level floor.

Tovations for all V Zones should be measured at the bottom of the lowest horizontal structural member.